



SAHM 880ECO Manual Winder

Market Segments:

- Carbon Fibers

Main Advantages:

- Compact and modular design
- Electronic metering of package lengths
- Load cell tension control
- Efficient yarn path with fewer contact points
- Central process control unit for input, display, control and storage of main winding and operation parameters


The SAHM 880ECO is an efficient and cost-saving solution for single-product winding

- An economical alternative to our SAHM 880XE with a fixed winding ratio
- All components meet the high standard required in carbon fiber winding. Plus: SAHM quality and know-how are part of the bargain!
- Best value for the money

Technology:

Drive:	Frequency controlled
Frame:	4 decks
Titer:	1 K-24 K (others on request)
Tube inside diameter:	76.2 mm
Tube length:	280 mm / 290 mm
Traverse length:	250 mm
Maxi. package diameter:	250 mm
Winding speed:	1-15 m/min.
Yarn tension:	Electronically adjustable

Combination of all maximum values is not possible

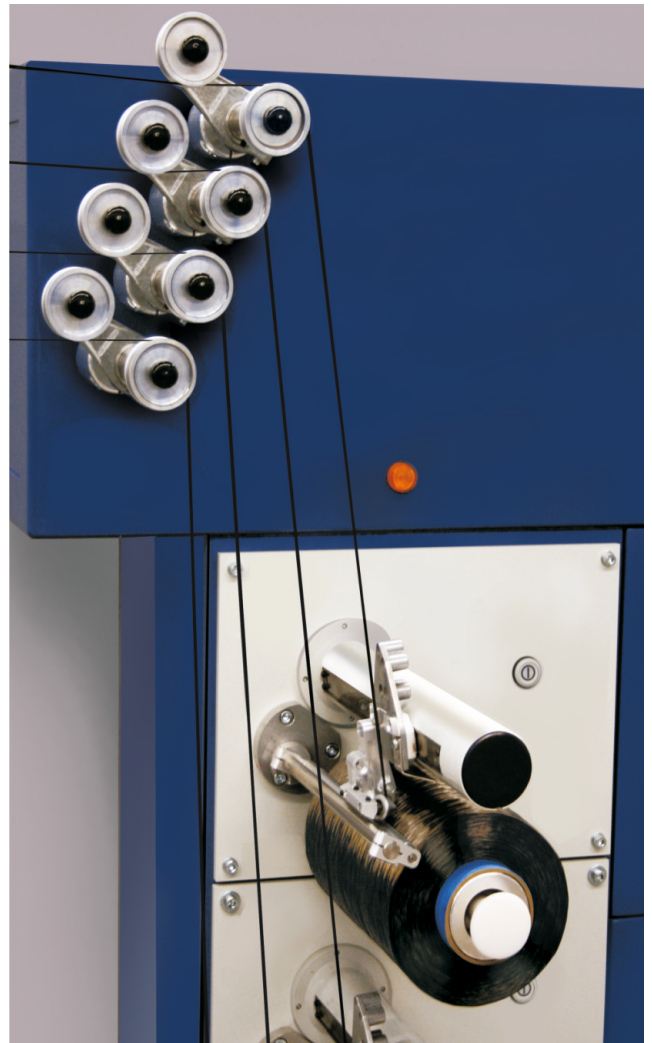

SAHM WINDERS + SYSTEMS
a member of Starlinger Group

Georg Sahn GmbH & Co. KG · Sudetenlandstrasse 33 · 37269 Eschwege · Germany

Tel.: +49 5651 804-0 · Fax: +49 5651 13620 · Internet: www.sahmwinder.de · E-mail: info@sahmwinder.de