



SAHM two60 TAPE

Precision Cross Winder

Market segments:

- Flat and fibrillated tapes, grass yarn, single and bundled monofilaments

Advantages / Features:


- Excellent package quality
- Electronic wind ratio
- Modular design with dual inverter technology
- Easy operator tape handling with minimum contact points
- Efficient product changes by electronic input of all winding parameters
- Central machine control by HMI II with 5,7" touch screen
- Meter counter / doff signal
- Minimum maintenance expenditures

Technology:

Drive:	Frequency controlled
Frame:	Up to 4 tiers
Titer:	150 to 20000 dtex *)
Material width:	Tapes: 1 end from 0.9 to 7 mm 2 ends from 2 x 0.9 mm Monofilaments, single ends: Ø 0.1 to 0.6 mm
Maximum winding speed:	600 m/min
Winding ratio:	Electronic
Traverse length:	200, 250 or 300 mm *)
Maximum package diameter:	320 mm
Tube inside diameter:	82.55 or 90 mm *)
Tube length:	230, 290 or 330 mm *)

Combination of all maximum values is not possible

*) others on request

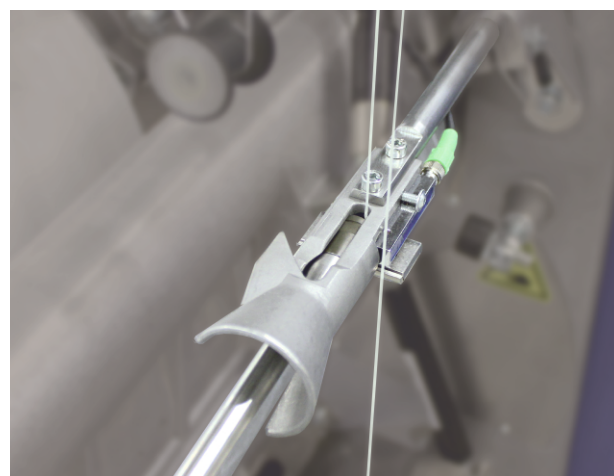

easyDOFFING (patented)

Options:

- The easyDoffing System automates processes during bobbin change-over making one-man operation possible
- Pneumatic mandrel
- Pneumatic yarn tension control (central or per head)
- Pneumatic bail pressure (central or per head)
- HMI II with 15" touchscreen



SAHM WINDERS + SYSTEMS
a member of Starlinger Group

Georg Sahn GmbH & Co. KG · Sudetenlandstrasse 33 · 37269 Eschwege · Germany

Tel.: +49 5651 804-0 · Fax: +49 5651 13620 · Internet: www.sahmwinder.de · E-mail: info@sahmwinder.de